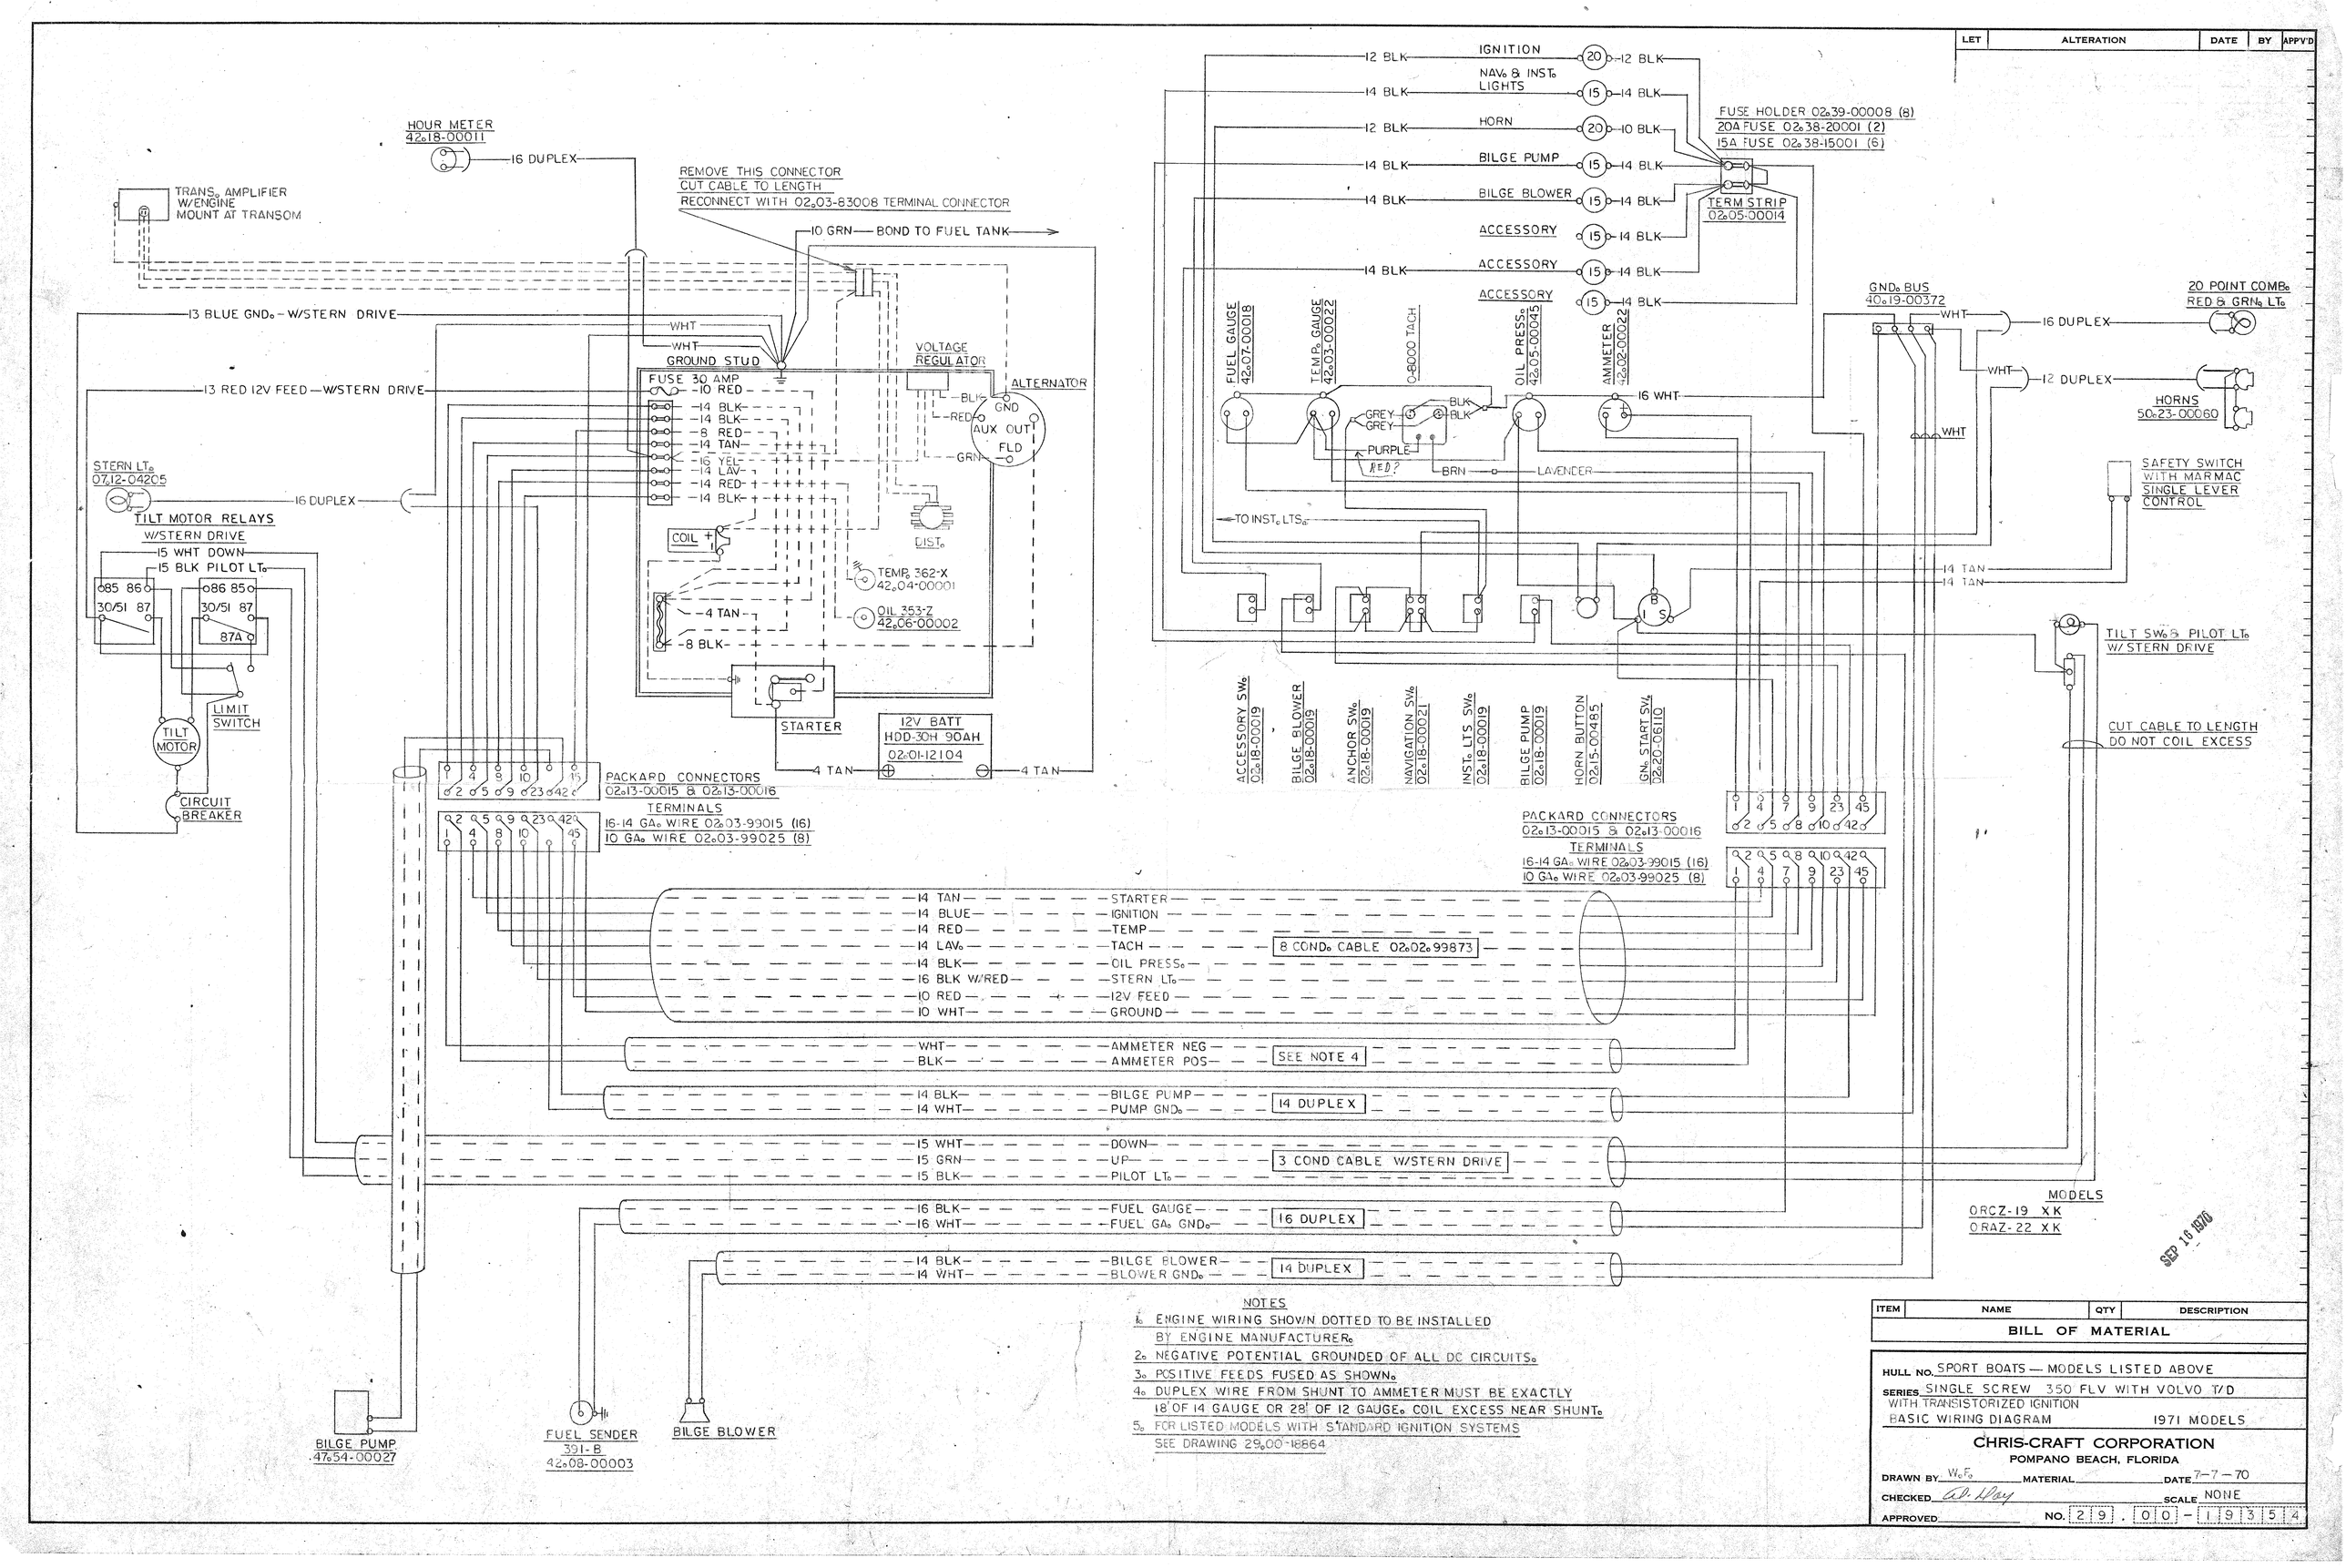

LET	ALTERATION	DATE	BY	APP'D

NOTES

1. ENGINE WIRING SHOWN DOTTED TO BE INSTALLED BY ENGINE MANUFACTURER.
2. NEGATIVE POTENTIAL GROUNDED OF ALL DC CIRCUITS.
3. POSITIVE FEEDS FUSED AS SHOWN.
4. DUPLEX WIRE FROM SHUNT TO AMMETER MUST BE EXACTLY 18' OF 14 GAUGE OR 28' OF 12 GAUGE. COIL EXCESS NEAR SHUNT.
5. FOR LISTED MODELS WITH STANDARD IGNITION SYSTEMS SEE DRAWING 29.00-18864

ITEM	NAME	QTY	DESCRIPTION

BILL OF MATERIAL

HULL NO. SPORT BOATS — MODELS LISTED ABOVE

SERIES SINGLE SCREW 350 FLV WITH VOLVO TYD WITH TRANSISTORIZED IGNITION

BASIC WIRING DIAGRAM 1971 MODELS

CHRIS-CRAFT CORPORATION

POMPANO BEACH, FLORIDA

DRAWN BY W.F. MATERIAL DATE 7-7-70

CHECKED Al Hay SCALE NONE

APPROVED NO. 29.00-18954